



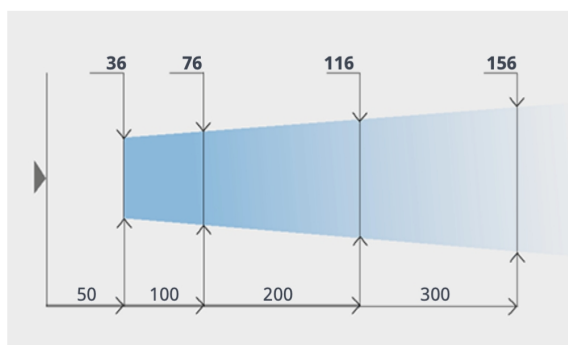

Noise reduction **20 dB(A)**

Air-/ cost savings **100 Nm³/h**

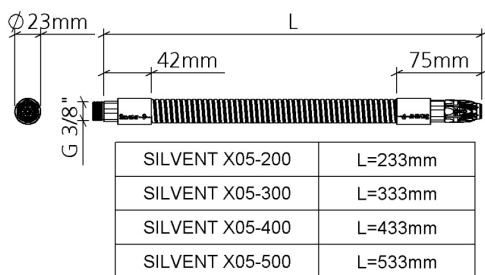

VA Multilaval nozzle SV X05-500

VA Multilaval nozzle X05 on VA/Flexblow /
16.0 N / L = 500 mm / AG 3/8

VA Multilaval nozzle SV X05-500: nozzle mounted on a bendable stainless steel FlexBlow hose that keeps the desired position, even when blowing at high pressure. Available in 4 different standard lengths. The FlexBlow hose has a 3/8" male connection thread. Otherwise, the same performance as X05.

Technical data

Item number	753055
Weight	454 g
Air consumption	85 Nm ³ /h
Sound	95 dB(A)
Blowing Power	16,0 N
Max. Operating pressure	1,0 MPa
Replaces open tube	10 mm
Max temperature	260 °C
Material	1.4404 Stainless Steel
Air pattern	Multi Laval
Connection	3/8 BSP