





Replaces open tube	10 mm
Noise reduction	25 dB(A)
Air-/ cost savings	109 Nm³/h

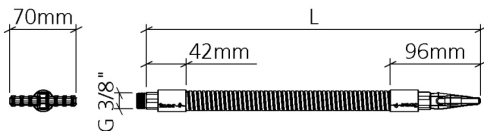

SILVENT 9005W-S-200	L=254mm
SILVENT 9005W-S-300	L=354mm
SILVENT 9005W-S-400	L=454mm
SILVENT 9005W-S-500	L=554mm

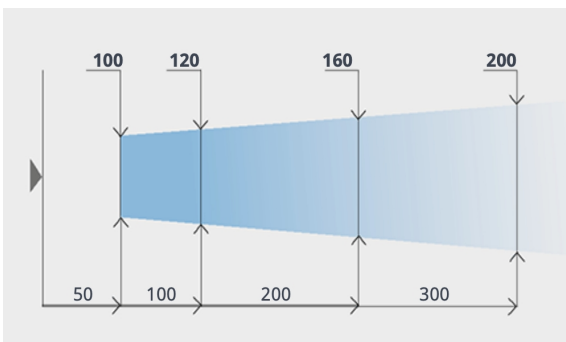

Flat spray nozzle SV 9005W-S-300

Flat spray nozzle SV 9005W-S on
VA-Flexblow / 15.0 N / L = 300 mm / AG 3/8

SV 9005W-S-300: nozzle mounted on a bendable stainless steel FlexBlow hose that keeps the desired position, even when blowing at high pressure. Available in 4 different standard lengths. The FlexBlow hose has a 1/4" male connection thread. Otherwise, the same performance as 9005W-S.

Technical data

Item number	753176
Weight	322 g
Air consumption	76,0 Nm³/h
Sound	87 dB(A)
Blowing Power	15,0 N
Max. Operating pressure	1,0 MPa
Max temperature	260 °C
Material	1.4404 Stainless Steel
Air pattern	Flat
Connection	3/8 BSP