




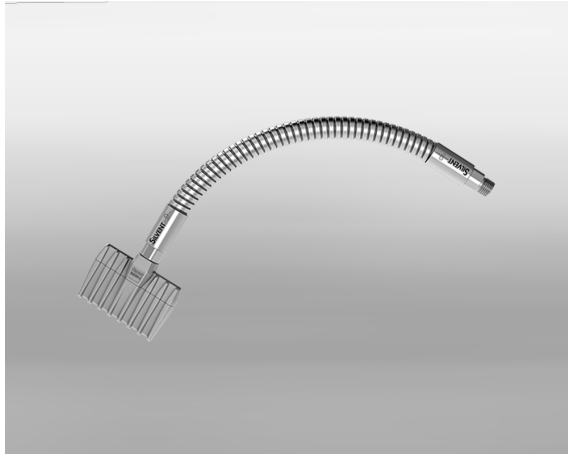

Replaces open tube	7 mm
Noise reduction	23 dB(A)
Air-/ cost savings	39 Nm³/h

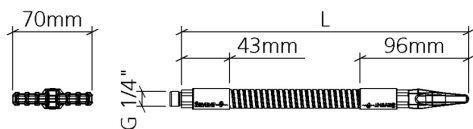

SILVENT 9003W-S-200	L=253mm
SILVENT 9003W-S-300	L=353mm
SILVENT 9003W-S-400	L=453mm
SILVENT 9003W-S-500	L=553mm

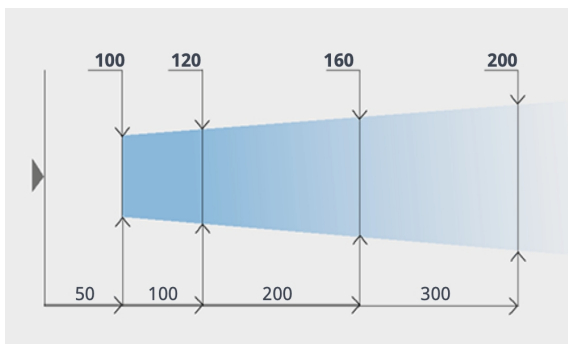

Flat spray nozzle SV 9003W-S-400

Flat spray nozzle SV 9003W-S on
VA-Flexblow / 10.3 N / L = 400 mm / AG 1/4

SV 9003W-S-400: nozzle mounted on a bendable stainless steel FlexBlow hose that keeps the desired position, even when blowing at high pressure. Available in 4 different standard lengths. The FlexBlow hose has a 1/4" male connection thread. Otherwise, the same performance as 9003W-S.

Technical data

Item number	753167
Weight	372 g
Air consumption	53 Nm³/h
Sound	82 dB(A)
Blowing Power	10,3 N
Max. Operating pressure	1,0 MPa
Max temperature	260 °C
Material	1.4404 Stainless Steel
Air pattern	Flat
Connection	1/4 BSP