


Replaces open tube **6 mm**

Noise reduction **24 dB(A)**

Air-/ cost savings **39 Nm³/h**

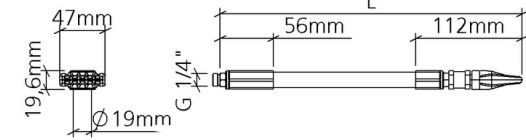

Silvent 220 W-Z

Flexblow L= 200mm with nozzle SV 9002
W-Z | 5,5N - male 1/4

Silvent 220 W-Z: The Silvent 9002W-Z nozzle mounted on a bendable FlexBlow hose. Keeps desired position even at high pressure. Available in 4 different standard lengths. Compressed air is optimally used in this flat nozzle, which through its unique design introduces a completely new blowing technology feature. The aerodynamic nozzle design achieves the effect by maximizing entrainment of air. Each orifice is also uniquely designed to optimize the entrainment area. These small orifices combined with the aerodynamic slots of the nozzle provide high efficiency.

Technical data

Item number	753124
Weight	245 g
Air consumption	28 Nm ³ /h
Air connection	1/4 "
Blowing Power	5,5 N
Dimensions LxWxH	225X47x19,6 mm
Max. Operating pressure	1,0 MPa
Max temperature	70 °C
Noise	78 dB(A)
Material	Zinc
Air pattern	Flat
Connection	1/4 BSP