





Replaces open tube	6 mm
Noise reduction	16 dB(A)
Air-/ cost savings	33 Nm³/h

Silvent X02-M500

VA magnet holder with VA Flexblow
L=500mm with Multi-Laval nozzle X02 | 6.5N
- IG 1/4

Silvent X02-M500: Magnetic holder with flow control, FlexBlow hose and nozzle for quick installation and easy adjustment to the correct blowing angle. The FlexBlow hose maintains the desired position even at high pressure. Available in 4 standard lengths. Otherwise the same performance as X02.

Technical data

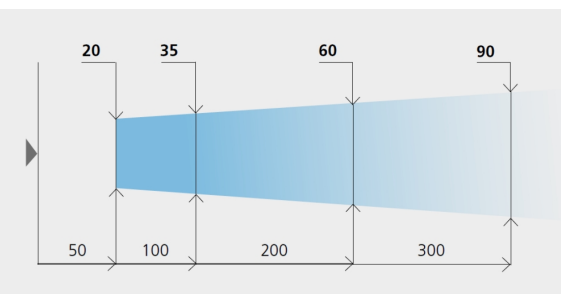

SILVENT X02-M200	L=315mm
SILVENT X02-M300	L=415mm
SILVENT X02-M400	L=515mm
SILVENT X02-M500	L=615mm

Item number	763033
Weight	1005 g
Air consumption	34 Nm³/h
Sound	86 dB(A)
Blowing Power	6,5 N
Max. Operating pressure	1,0 MPa
Max temperature	70 °C
Material	1.4404 Stainless Steel
Air pattern	Multi Laval
Connection	1/4 BSP